



No Chimney Required

Vents Up To 40 Feet
Using 3" ULC S636
PVC or CPVC Pipe

100,000 BTU and
130,000 BTU Models
Are Certified To
Vent With 2"
ULC S636
PVC or CPVC Pipe




Available in Sizes Ranging From 55 - 119 Gallon Models

▶ 100,000 BTU/Hr. thru 199,000 BTU/Hr.

Rheem AdvantagePlus™ Gas Commercial Water Heaters are specifically designed to provide customers with maximum savings on operation, space and installation. Designed with the most advanced technology available, these products optimize efficiency and operating reliability.

Construction Features:

- 316L stainless steel tank construction (requires no anode rods).
- No chimney required; direct vent using plastic pipe.
- Thermal efficiency of 95% dramatically reduces operating costs.
- 85 equivalent feet of vent length.
- Low NO_x emissions.
- High impact plastic jacket eliminates dents.
- 2" of non-CFC, polyurethane foam insulation.
- Less than 1/2 degree per hour heat loss (R17).
- Corrosion resistant, high efficiency 90/10 cupronickel heat exchanger.
- Self-diagnostic electronic control with digital readout for water temperature, set point and differential.
- Removable front cover allows easy access to equipment (24" service clearance recommended).
- Temperature range from 21°C (70°F) to 71°C (160°F) (maximum temperature setting of 82°C (180°F) available on HE55-160 and HE55-199 booster models only).
- Zero clearance to all combustible surfaces.
- Factory installed AGA/ASME rated T&P relief valve.
- Booster installation kit provided with HE55-160 and HE55-199 booster models.

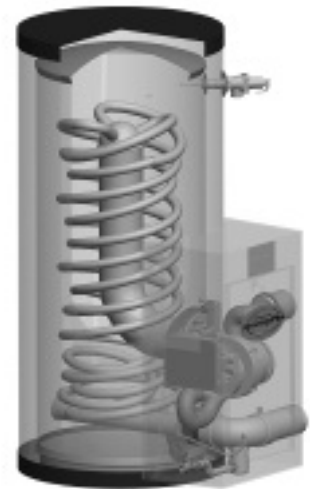

Certifications and Ratings:

The water heaters are UL/ULC listed and exceed the minimum efficiency and standby loss requirements of current ASHRAE standards. All water heaters are supplied with an AGA/ASME rated temperature and pressure relief valve.

The control panel is an integrated solid state temperature and ignition control device with integral diagnostics, LED fault display capability and a digital display of temperature settings.

CERTIFIED FOR A 150 PSI MAXIMUM WORKING PRESSURE.

Limited Warranty

This product features a three year limited warranty against tank leaks. Please refer to Commercial Warranty Information brochure for complete warranty information.

RECOVERY CAPACITIES

Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at Various Temperature Rises

MODEL NUMBER	INPUT (BTU/HR) NAT. & LP	THERMAL EFFICIENCY	UNITS	40°F (22°C)	50°F (28°C)	60°F (33°C)	70°F (39°C)	80°F (45°C)	90°F (50°C)	100°F (56°C)	110°F (61°C)	120°F (67°C)	130°F (72°C)	140°F (78°C)
HE55-100	100,000	95%	GPH	288	230	192	165	144	128	115	105	96	N/A	N/A
			LPH	1090	872	726	623	545	484	436	396	363	N/A	N/A
HE55-130 HE80-130 HE119-130	130,000	95%	GPH	374	299	249	214	187	166	150	136	125	N/A	N/A
			LPH	1417	1133	944	809	708	630	567	515	472	N/A	N/A
HE80-160 HE119-160	160,000	95%	GPH	461	368	307	263	230	205	184	167	154	N/A	N/A
			LPH	1744	1395	1162	996	872	775	697	634	581	N/A	N/A
HE80-199 HE119-199	199,000	95%	GPH	573	458	382	327	286	255	229	208	191	N/A	N/A
			LPH	2169	1735	1446	1239	1084	964	867	789	723	N/A	N/A
BOOSTER MODELS														
HE55-160	160,000	95%	GPH	461	368	307	263	230	205	184	167	154	142	132
			LPH	1744	1395	1162	996	872	775	697	634	581	536	498
HE55-199	199,000	95%	GPH	573	458	382	327	286	255	229	208	191	176	164
			LPH	2169	1735	1446	1239	1084	964	867	789	723	667	620

Recovery rating is based on thermal efficiencies obtained in an UL certified laboratory.

MAXIMUM DELIVERY

In U.S. Gallons and Liters (Includes useable storage and recovery for indicated times)

MODEL NUMBER	GALLONS	LITERS	INPUT (BTU/HR) NAT. & LP	TEMP. RISE	UNITS	5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	45 MIN.	1 HR.	2 HR.	3 HR.	MIN. TO RECOVER CONTENTS
HE55-100	55	208	100,000	100°F	GAL.	48	58	67	77	96	125	154	269	384	29
				37.7°C	LTR.	182	219	255	291	364	473	582	1019	1455	
HE55-130	55	208	130,000	100°F	GAL.	51	63	76	88	113	151	188	338	488	22
				37.7°C	LTR.	193	240	288	335	430	571	713	1281	1848	
HE80-130	80	303	130,000	100°F	GAL.	68	81	93	106	131	168	206	355	505	32
				37.7°C	LTR.	259	306	354	401	495	637	779	1345	1912	
HE119-130	119	450	130,000	100°F	GAL.	96	108	121	133	158	196	233	383	532	48
				37.7°C	LTR.	363	410	457	504	599	750	882	1449	2015	
HE55-160	55	208	160,000	100°F	GAL.	54	69	85	100	131	177	223	407	591	18
				37.7°C	LTR.	204	262	320	379	495	670	844	1542	2241	
HE80-160	80	303	160,000	100°F	GAL.	71	87	102	117	148	194	240	424	609	26
				37.7°C	LTR.	270	328	386	444	561	735	909	1607	2304	
HE119-160	119	450	160,000	100°F	GAL.	99	114	129	145	175	221	268	452	636	39
				37.7°C	LTR.	373	432	490	548	664	838	1013	1710	2408	
HE55-199	55	208	199,000	100°F	GAL.	58	77	96	115	153	210	268	497	726	14
				37.7°C	LTR.	218	291	363	435	580	797	1014	1883	2751	
HE80-199	80	303	199,000	100°F	GAL.	75	94	113	132	171	228	285	514	743	21
				37.7°C	LTR.	284	357	429	501	646	863	1079	1947	2814	
HE119-199	119	450	199,000	100°F	GAL.	102	121	141	160	198	255	312	542	771	31
				37.7°C	LTR.	338	460	532	604	749	966	1183	2050	2918	

DIMENSIONAL INFORMATION

All dimensions shown in English and Metric

MODEL NUMBER	UNITS	A	B	C	D	E	F	G	H	VENT	WATER CONNECTIONS		APPROX SHIPPING WT.
											INLET	OUTLET	
HE55-100 HE55-130	inches	52	23 1/2	32	45	5	25 1/4	27 9/16	5 7/8	2	1	1	175 lbs.
	mm	1321	597	813	1143	127	641	700	149	51	25	25	79 kgs
HE55-160 HE55-199	inches	52	23 1/2	32	45	5	25 1/4	27 9/16	5 7/8	3	1	1	175 lbs.
	mm	1321	597	813	1143	127	641	700	149	76	25	25	79 kgs
HE80-130 HE80-160 HE80-199	inches	72	23 1/2	32	65	5	25 1/4	20 1/4	7 3/4	3*	1-1/2	1-1/2	235 lbs.
	mm	1854	597	813	1651	127	641	514	197	76	38	38	106 kgs
HE119-130 HE119-160 HE119-199	inches	73	27	36	66 3/4	6 3/4	28 7/8	22	9 1/2	3*	1-1/2	1-1/2	405 lbs.
	mm	1854	686	914	1695	171	733	559	241	76	38	38	184 kgs

* 130,000 BTU models are certified to be installed with 2" venting. • All models require a 120V power source. • See use and care manual for venting details.

Commercial water heaters
from Rheem



In keeping with its policy of continuous progress and product improvement, Rheem-Ruud reserves the right to make changes without notice.

Rheem Manufacturing Company • Water Heater Division
Rheem Canada Ltd./Ltée, 125 Edgeware Road, Unit 1 • Brampton, Ontario L6Y 0P5